


EP

EP150-200-300-400-500-600-800-1000



modello	codice contabile	codice a barre	descrizione
EP 150	SN0150CZV001	8023945 502226	SC.EL.IT.150 C/PIEDI 2000 W 230 V
EP 200	SN0200CZV002	8023945 502220	SC.EL.IT.200 C/PIEDI 2000 W 230 V
EP 300	SN0300CZV003	8023945 568222	SC.EL.IT.300 C/PIEDI 3000 W 230/380 V
EP 400	SN0400CZV004	8023945 568229	SC.EL.IT.400 C/PIEDI 4000 W 230/380 V
EP 500	SN0500CZV005	8023945 570225	SC.EL.IT.500 C/PIEDI 5000 W 230/380 V
EP 600	SN0600CZV006	8023945 570324	SC.EL.IT.600 C/PIEDI 6000 W 230/380 V
EP 800	SN0800CZV007	8023945 571222	SC.EL.IT.800 C/PIEDI 8000 W 380 V
EP 1000	SN1000CZV008	8023945 580224	SC.EL.IT.1000 C/PIEDI 10000 W 380 V

modello	A	B	C	D	E	I
EP 150 mm	540	1150	480	280	260	3/4"
EP 200 mm	540	1350	480	280	380	3/4"
EP 300 mm	700	1450	600	360	470	1" 1/4
EP 400 mm	750	1580	650	360	470	1" 1/4
EP 500 mm	750	1780	650	360	600	1" 1/4
EP 600 mm	800	1900	700	360	600	1" 1/4
EP 800 mm	1000	1870	900	370	600	1" 1/4
EP 1000 mm	1000	2150	900	370	600	1" 1/4

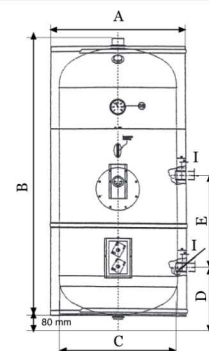

MODELLO	Profilo	Classe Energetica	Consumo kWh/annum	dispersione termica 65°C (Kwh/24h)	Potenza W	Voltaggio V	Tempo di Risc. ΔT 50°C	Pressione Max esercizio (bar)	Produzione acqua calda(l/h)
EP 150	L	D	4719	12,92	1500	230	218	6	55
EP 200	L	D	4719	12,92	2000	230	218	6	82
EP 300	L	D	6292	17,23	3000	380	191	6	125
EP 400	L	D	8389	22,98	4000	380	215	6	139
EP 500	L	D	10486	28,72	5000	380	215	6	167
EP 600	L	D	12584	34,92	6000	380	215	6	223
EP 800	L	D	16958	46,46	8000	380	215	6	80
EP 1000	L	D	21047	57,66	10000	380	215	6	280



componenti conformi agli standard RSH



resistenza corazzata in rame



anodo di magnesio



connessione per il ricircolo



foro di scarico



termostato di sicurezza



isolamento poliuretano



lampada spia



valvola di sicurezza